

MIN Series Size I Cordsets

North American Color Code ❖ TPE Jacket ❖ 16 AWG 600V




Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs		Male Plugs	Male - Female Extension Cables
					Straight	Right Angle	Straight	
	3	1-Green/Yellow 2-Black 3-White	16 600V 13A	3 FT	MINW-3FP-3	MINW-3FP-3-R	MINW-3MP-3	MINW-3MFP-3
				6 FT	MINW-3FP-6	MINW-3FP-6-R	MINW-3MP-6	MINW-3MFP-6
				12 FT	MINW-3FP-12	MINW-3FP-12-R	MINW-3MP-12	MINW-3MFP-12
				20 FT	MINW-3FP-20	MINW-3FP-20-R	MINW-3MP-20	MINW-3MFP-20
				30 FT	MINW-3FP-30	MINW-3FP-30-R	MINW-3MP-30	MINW-3MFP-30
	5	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black	16 600V 8A	3 FT	MINW-5FP-3	MINW-5FP-3-R	MINW-5MP-3	MINW-5MFP-3
				6 FT	MINW-5FP-6	MINW-5FP-6-R	MINW-5MP-6	MINW-5MFP-6
				12 FT	MINW-5FP-12	MINW-5FP-12-R	MINW-5MP-12	MINW-5MFP-12
				20 FT	MINW-5FP-20	MINW-5FP-20-R	MINW-5MP-20	MINW-5MFP-20
				30 FT	MINW-5FP-30	MINW-5FP-30-R	MINW-5MP-30	MINW-5MFP-30


MIN Series Size I Cordsets

Specifications:


- Body: Oil Resistant Yellow PVC
- Contacts: Copper Alloy with Gold Plating
- Coupling Nut: Clear Anodized Aluminum
- Cable: Weld Slag Resistant Yellow TPE Jacket,
16 AWG Rated at 600V, 80°C
Non-Wicking, Non-Hygroscopic, SEOOW Style
- Temperature: -40°C to +80°C (-40°F to +176°F)
- Protection: IP 67
- Approvals: U.S.: UL Recognized
Canada: C-UL Recognized

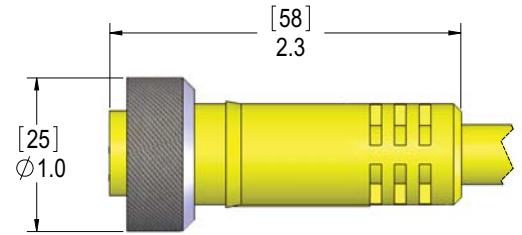

Straight Plug

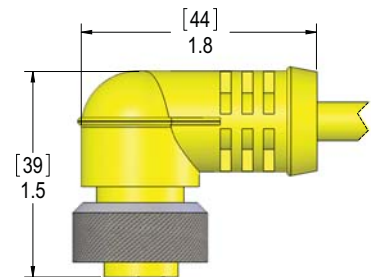

Right Angle Female Plug

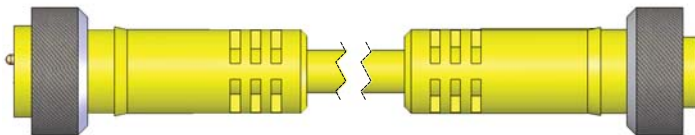

Male - Female Extension