











MIN Series Size I Receptacles

Male - Female Through Panel Receptacles





Face View of Male	# of Poles	Rating	Male-Female Receptacles	Wiring	Face View of Female
	2	600V 13A	MIN-2MFR-TM	1 to 1 2 to 2	
	3	600V 13A	MIN-3MFR-TM	1 to 1 2 to 2 3 to 3	
	4	600V 10A	MIN-4MFR-TM	1 to 1 2 to 2 3 to 3 4 to 4	
	5	600V 8A	MIN-5MFR-TM	1 to 1 2 to 2 3 to 3 4 to 4 5 to 5	
	6	600V 8A	MIN-6MFR-TM	1 to 1 2 to 2 3 to 3 4 to 4 5 to 5 6 to 6	

MIN Series Size I Receptacles

Specifications:

Shell: Clear Anodized Aluminum
 Insulator: 105°C, Oil Resistant Yellow PVC
 Contacts: Copper Alloy with Gold Plating
 Jam Nut: Clear Anodized Aluminum
 Thrust Washer: Zinc Die-Cast
 Sealing Washer: BUNA-N
 Temperature: -40°C to 105°C (-40°F to +221°F)
 Protection: IP 67

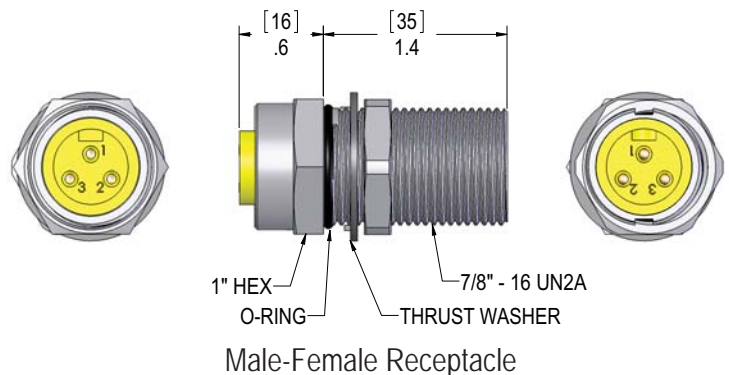

Cut-out