




# MIN Series Size III Cordsets

North American Color Code ❖ PVC Cable ❖ 18 AWG 300V Female Right Angle





Face View of Female	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs Right Angle
	9	1-Orange 2-Blue 3-Red w/ Black 4-Green w/ Black 5-White 6-Red 7-Green/Yellow 8-White w/ Black 9-Black	18  300V 4A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-9FPX-3-R MIN-9FPX-6-R MIN-9FPX-12-R MIN-9FPX-20-R MIN-9FPX-30-R
	10	1-Orange 2-Blue 3-White w/ Black 4-Red w/ Black 5-Green w/ Black 6-Orange w/ Black 7-Red 8-Green/Yellow 9-Black 10-White	18  300V 4A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-10FPX-3-R MIN-10FPX-6-R MIN-10FPX-12-R MIN-10FPX-20-R MIN-10FPX-30-R
	12	1-Orange 2-Blue 3-White w/ Black 4-Red w/ Black 5-Green w/ Black 6-Orange w/ Black 7-Blue w/ Black 8-Black w/ White 9-Green/Yellow 10-Red 11-White 12-Black	18  300V 4A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-12FPX-3-R MIN-12FPX-6-R MIN-12FPX-12-R MIN-12FPX-20-R MIN-12FPX-30-R

For Stainless Steel coupling nut, please consult the factory.

### Specifications:

- Body: Oil Resistant Yellow PVC
- Contacts: Copper Alloy with Gold Plating
- Coupling Nut: Clear Anodized Aluminum
- Cable: Oil Resistant Yellow PVC Jacket,  
Rated at 300V, 105°C, Non-Wicking,  
Non-Hygroscopic, AWM Style 2661
- Conductors: 18 AWG Bare Copper, PVC Insulated
- Temperature: -40°C to +105°C (-40°F to +221°F)
- Protection: IP 67
- Approvals: U.S.: UL Recognized  
Canada: C-UL Recognized

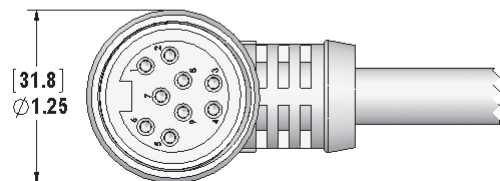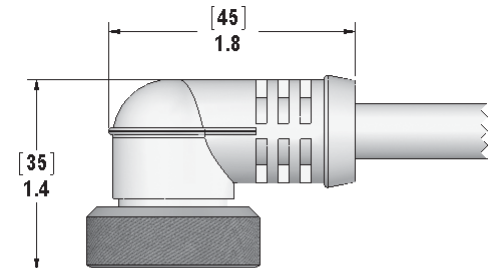

MIN Series Size III Cordsets