




# MIN Series Size III Field Wireable Plugs

18-22 AWG 600V MAX


MIN Series Size III Cordsets

Face View of Male	# of Poles	Wire AWG Rating	Cable O.D. Range	Female Straight (Female Threads)	Male Straight (Female Threads)	Male Straight (Male Threads)
	9	18-22 AWG 600V MAX 4A MAX	5-13 mm 8-17 mm	MIN-9FP-FW MIN-9FP-FWX	MIN-9MP-FW MIN-9MP-FWX	MIN-9MPM-FW MIN-9MPM-FWX
	10	18-22 AWG 600V MAX 4A MAX	5-13 mm 8-17 mm	MIN-10FP-FW MIN-10FP-FWX	MIN-10MP-FW MIN-10MP-FWX	MIN-10MPM-FW MIN-10MPM-FWX
	12	18-22 AWG 600V MAX 4A MAX	5-13 mm 8-17 mm	MIN-12FP-FW MIN-12FP-FWX	MIN-12MP-FW MIN-12MP-FWX	MIN-12MPM-FW MIN-12MPM-FWX


Connection via solder cup terminal. Voltage and amperage ratings are cable dependent and are based on 600V 18 AWG cable. Cables with lower voltage ratings and smaller conductors will lower these ratings.

## Specifications:

Body: Polyamide & Polybutylene Terephthalate (PBT)  
 Contacts: Copper Alloy with Gold Plating  
 O-Ring: BUNA-N  
 Coupling Nut: Black Anodized Aluminum  
 Insert: PVC  
 Temperature: -40°C to +90°C (-40°F to +194°F)  
 Protection: IP 67 MAX  
 Approvals: UL Pending

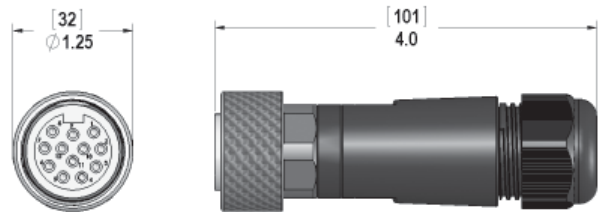

Male or Female Plug with Female Threads

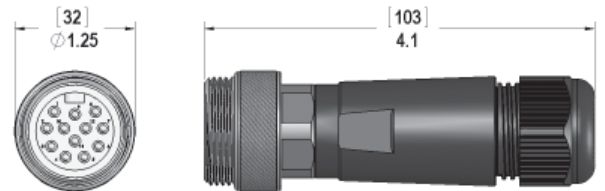

Male Plug with Male Threads