




MIN Power Series Size I Receptacles

North American Color Code ❖ 1/2" - 14 NPT Threads ❖ Metric Threads

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Thread Type	Length	Male Receptacles	Female Receptacle
	3	1-Green/Yellow 2-Black 3-White	14 600V 18A	1/2" NPT	1 FT 3 FT 6 FT	MINH-3MR-1 MINH-3MR-3 MINH-3MR-6	MINH-3FR-1 MINH-3FR-3 MINH-3FR-6
				M16 x 1.5	1 FT 3 FT 6 FT	MINH-3MR-1-M16 MINH-3MR-3-M16 MINH-3MR-6-M16	MINH-3FR-1-M16 MINH-3FR-3-M16 MINH-3FR-6-M16
				M20 x 1.5	1 FT 3 FT 6 FT	MINH-3MR-1-M20 MINH-3MR-3-M20 MINH-3MR-6-M20	
	4	1-Black 2-White 3-Red 4-Green/Yellow	14 600V 15A	1/2" NPT	1 FT 3 FT 6 FT	MINH-4MR-1 MINH-4MR-3 MINH-4MR-6	MINH-4FR-1 MINH-4FR-3 MINH-4FR-6
				M16 x 1.5	1 FT 3 FT 6 FT	MINH-4MR-1-M16 MINH-4MR-3-M16 MINH-4MR-6-M16	MINH-4FR-1-M16 MINH-4FR-3-M16 MINH-4FR-6-M16
				M20 x 1.5	1 FT 3 FT 6 FT	MINH-4MR-1-M20 MINH-4MR-3-M20 MINH-4MR-6-M20	
	7	1-White w/ Black 2-Black 3-White 4-Red 5-Orange 6-Blue 7-Green/Yellow	14/2 & 18/5 300V 5A	1/2" NPT	1 FT 3 FT 6 FT	MINH-7MR-1 MINH-7MR-3 MINH-7MR-6	MINH-7FR-1 MINH-7FR-3 MINH-7FR-6
				M16 x 1.5	1 FT 3 FT 6 FT	MINH-7MR-1-M16 MINH-7MR-3-M16 MINH-7MR-6-M16	MINH-7FR-1-M16 MINH-7FR-3-M16 MINH-7FR-6-M16
				M20 x 1.5	1 FT 3 FT 6 FT	MINH-7MR-1-M20 MINH-7MR-3-M20 MINH-7MR-6-M20	

Specifications:

Shell: Clear Anodized Aluminum
Insulator: 105°C, Oil Resistant Yellow PVC
Wire: 14 AWG: UL Style 1015, 600V
 18 AWG: UL Style 1007, 300V
Contacts: Copper Alloy with Gold Plating
Temperature: -40°C to 105°C (-40°F to +221°F)
Protection: IP 67
Approvals: U.S.: UL Recognized
 Canada: C-UL Recognized

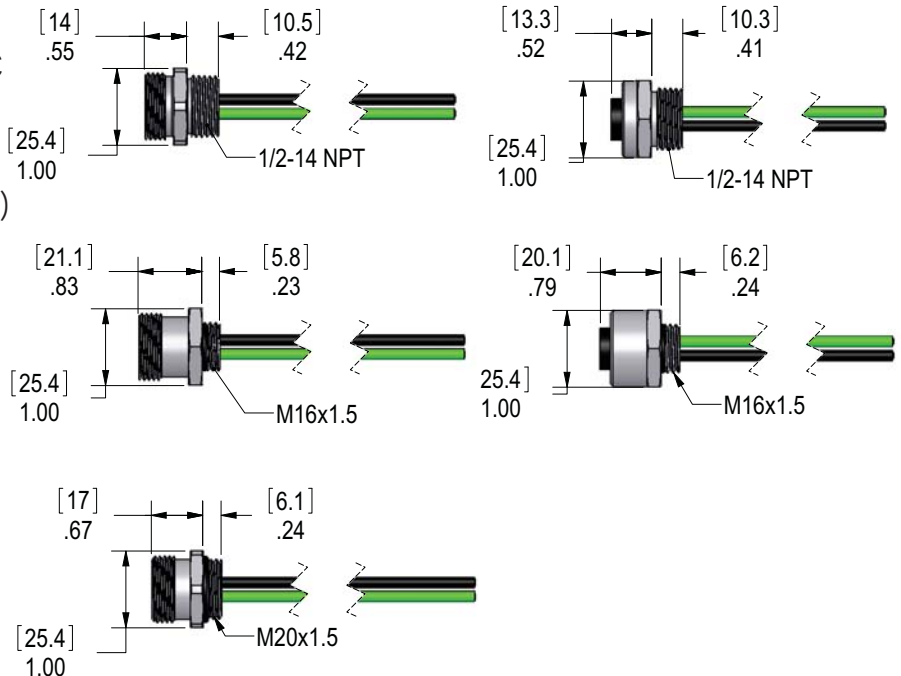

Male Receptacles

Female Receptacles