



MCV Series M23 Cordsets


Male Cables with Female Couplings ❖ Male Cables with Male Couplings

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Male Cables (Female Couplings)	Male Cables (Male Couplings)
	12	1-Brown 2-Not Used 3-Blue 4-White 5-Green 6-Yellow 7-Gray 8-Pink 9-Red 10-Black 11-Violet 12-Green/Yellow	18/3 300V 8A & 22/8 300V 4A	2 M 5 M 10 M 20 M	MCV-12MP-2M MCV-12MP-5M MCV-12MP-10M MCV-12MP-20M	MCV-12MPM-2M MCV-12MPM-5M MCV-12MPM-10M MCV-12MPM-20M
	19	1-Violet 2-Red 3-Gray 4-Red w/ Blue 5-Green 6-Blue 7-Gray/Pink 8-White w/ Green 9-White w/ Yellow 10-White w/ Gray 11-Black 12-Green/Yellow 13-Yellow w/ Brown 14-Brown w/ Green 15-White 16-Yellow 17-Pink 18-Gray w/ Brown 19-Brown	18/3 300V 8A & 22/16 300V 4A	2 M 5 M 10 M 20 M	MCV-19MP-2M MCV-19MP-5M MCV-19MP-10M MCV-19MP-20M	MCV-19MPM-2M MCV-19MPM-5M MCV-19MPM-10M MCV-19MPM-20M


Brown, Blue and Green/Yellow are 18AWG wires.

Specifications:

Body: Nickel Plated Brass
 Contacts: Copper Alloy with Gold Plating
 Cable: Oil Resistant Black PUR Jacket,
 Rated at 300V, 80°C, Non-Wicking,
 Non-Hygroscopic, AWM Style 20233
 Conductors: 18 AWG, PVC Insulated
 22 AWG, PVC Insulated
 Temperature: -40°C to +80°C (-40°F to +176°F)
 Protection: IP 67

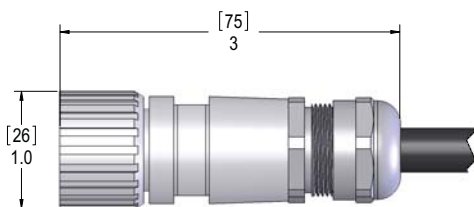

Male Plugs with Female Threads

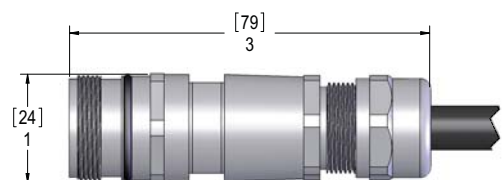

Male Plugs with Male Threads