



inserts: page
CME3 + 2 (aux) poles + ⊕ 115

insert centre distance:
57 x 27 mm

bulkhead mounting housings with 2 levers or 4 pegs



bulkhead mounting housings with single lever




description	part No.	part No.
with one or two levers	CMI 03	CMI 03 L
with pegs and aluminium cover ¹⁾	CMI 03 CS	
with pegs and plastic cover ¹⁾	CMI 03 CP	
with lever and cover		CMI 03 LS

¹⁾ May be combined with hoods:
 - CMO/CMAO 03 X e CMV/CMAV 03 X
 - MMO/MMAO 03 X e MMV/MMAV 03 X


N.B.: the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.
 The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm




dimensions in mm

CMI

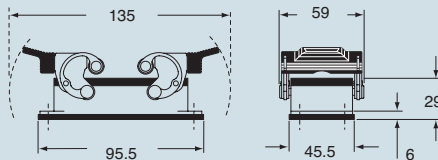


dimensions in mm


CMI L

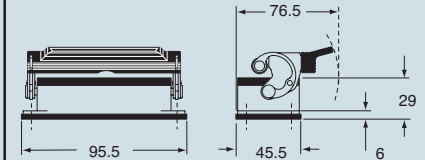

CMI CS/CP

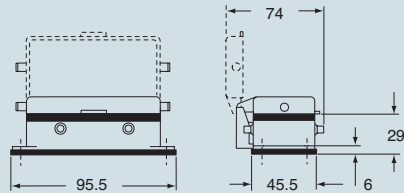

CMI LS

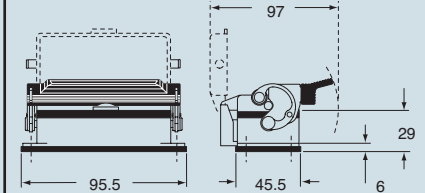

CALUS® Type 4/4X/12
 (excluding enclosures with plastic cover)

dimensions indicated are not binding and may be changed without notice

size 57.27