
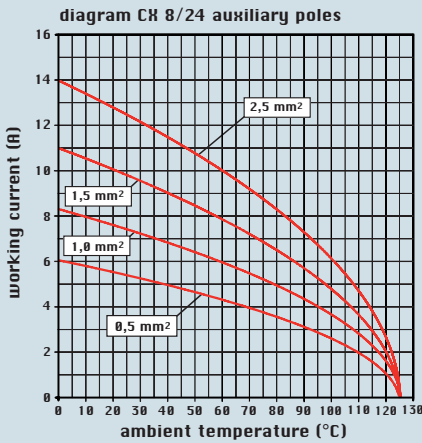


CX 8/24 series
CX 6/36 series


curves

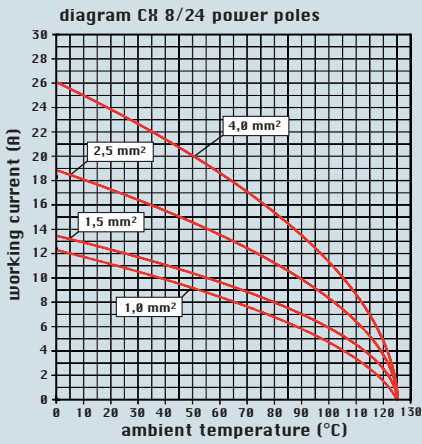

Note: for connector with power poles and auxiliary poles simultaneously loaded in the combinations



power poles	auxiliary poles
4.0 mm ²	2.5 mm ²
2.5 mm ²	1.5 mm ²
1.5 mm ²	1.0 mm ²
1.0 mm ²	0.5 mm ²

with power / auxiliary current ratios = 1.6 / 1

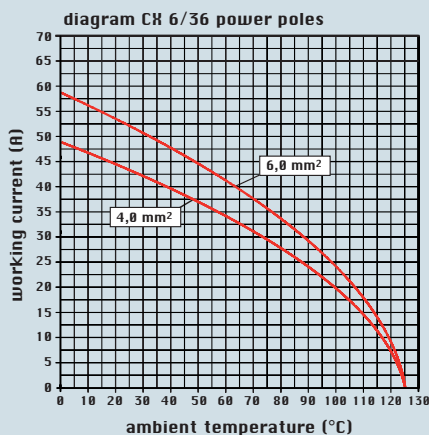




CX 12/2 series
CX 4/0 series

curves

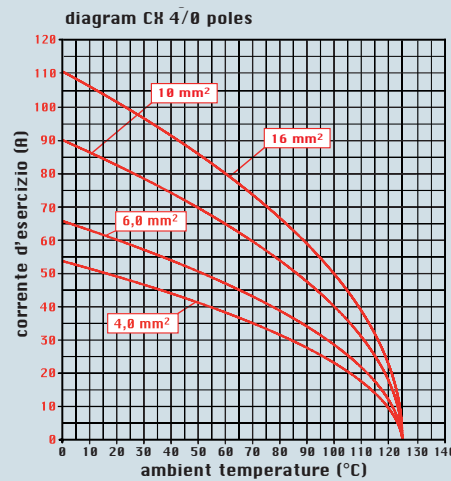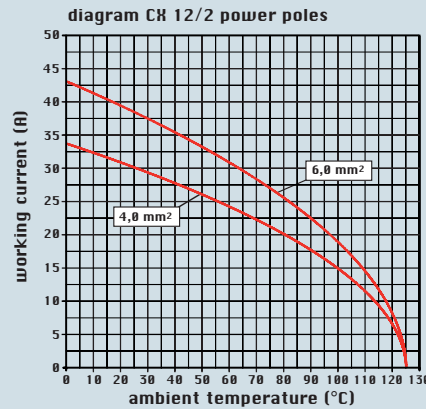

CX 4/2 series

curves

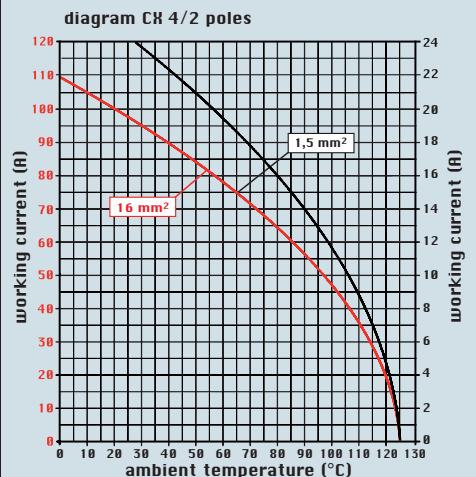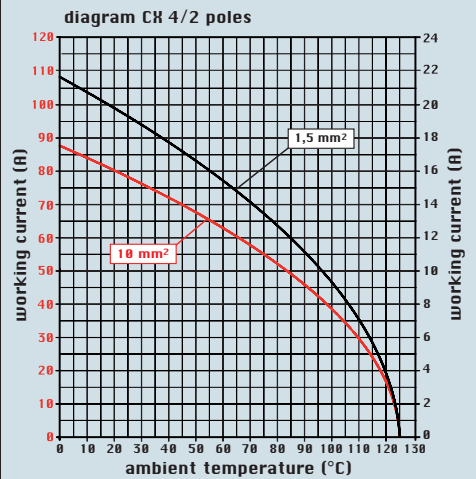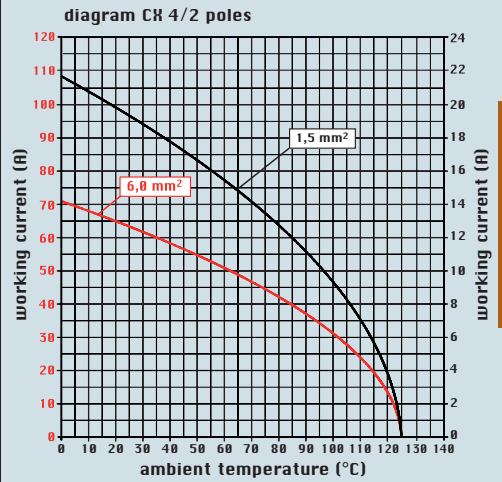

load curves