



MIN Series Size I Cordsets

North American Color Code ❖ PVC Cable ❖ 18 AWG 300V Plugs


MIN Series Size I Cordsets

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs		Male Plugs	
					Straight	Right Angle	Straight	Right Angle
	3	1-Green/Yellow 2-Black 3-White	18 300V 10A	3 FT	MIN-3FPX-3	MIN-3FPX-3-R	MIN-3MPX-3	MIN-3MPX-3-R
6 FT				MIN-3FPX-6	MIN-3FPX-6-R	MIN-3MPX-6	MIN-3MPX-6-R	
12 FT				MIN-3FPX-12	MIN-3FPX-12-R	MIN-3MPX-12	MIN-3MPX-12-R	
20 FT				MIN-3FPX-20	MIN-3FPX-20-R	MIN-3MPX-20	MIN-3MPX-20-R	
30 FT				MIN-3FPX-30	MIN-3FPX-30-R	MIN-3MPX-30	MIN-3MPX-30-R	
	5	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black	18 300V 5.5A	3 FT	MIN-5FPX-3	MIN-5FPX-3-R	MIN-5MPX-3	MIN-5MPX-3-R
6 FT				MIN-5FPX-6	MIN-5FPX-6-R	MIN-5MPX-6	MIN-5MPX-6-R	
12 FT				MIN-5FPX-12	MIN-5FPX-12-R	MIN-5MPX-12	MIN-5MPX-12-R	
20 FT				MIN-5FPX-20	MIN-5FPX-20-R	MIN-5MPX-20	MIN-5MPX-20-R	
30 FT				MIN-5FPX-30	MIN-5FPX-30-R	MIN-5MPX-30	MIN-5MPX-30-R	
	6	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black 6-Blue	18 300V 5.5A	3 FT	MIN-6FPX-3	MIN-6FPX-3-R	MIN-6MPX-3	MIN-6MPX-3-R
6 FT				MIN-6FPX-6	MIN-6FPX-6-R	MIN-6MPX-6	MIN-6MPX-6-R	
12 FT				MIN-6FPX-12	MIN-6FPX-12-R	MIN-6MPX-12	MIN-6MPX-12-R	
20 FT				MIN-6FPX-20	MIN-6FPX-20-R	MIN-6MPX-20	MIN-6MPX-20-R	
30 FT				MIN-6FPX-30	MIN-6FPX-30-R	MIN-6MPX-30	MIN-6MPX-30-R	



For Stainless Steel or Nylon coupling nut on straight cordsets, add a "-SS" suffix for Stainless or "-N" for Nylon (e.g. MIN-3FPX-6 becomes MIN-3FPX-6-SS). Please consult the factory for stainless steel or nylon right angle cordsets.

Specifications:

- Body: Oil Resistant Yellow PVC
- Contacts: Copper Alloy with Gold Plating
- Coupling Nut: Clear Anodized Aluminum
- Cable: Oil Resistant Yellow PVC Jacket,
Rated at 300V, 105°C, Non-Wicking,
Non-Hygroscopic, AWM Style 2661 or SJTOOW
- Conductors: 18 AWG Bare Copper, PVC Insulated
- Temperature: -40°C to +105°C (-40°F to +221°F)
- Protection: IP 67
- Approvals: U.S.: UL Recognized
Canada: C-UL Recognized

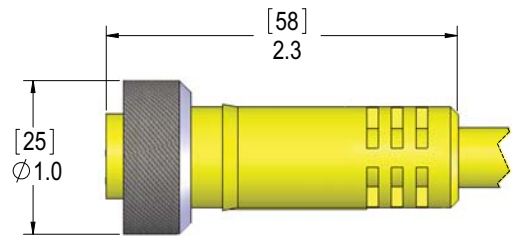

Straight Plug

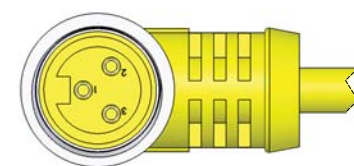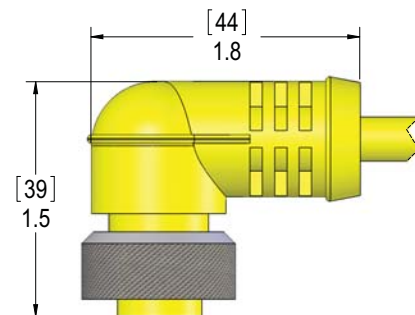

Right Angle Female Plug