



MIN Series Size I Cordsets

Polyurethane Jacket ❖ 16 AWG 600V Plugs ❖ 18 AWG 300V Plugs


MIN Series Size I Cordsets

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs		Male Plugs
					Straight	Right Angle	Straight
	3	1-Green/Yellow 2-Black 3-White	16 600V 13A	3 FT 6 FT 12 FT 20 FT 30 FT	MINP-3FP-3 MINP-3FP-6 MINP-3FP-12 MINP-3FP-20 MINP-3FP-30	MINP-3FP-3-R MINP-3FP-6-R MINP-3FP-12-R MINP-3FP-20-R MINP-3FP-30-R	MINP-3MP-3 MINP-3MP-6 MINP-3MP-12 MINP-3MP-20 MINP-3MP-30
	4	1-Brown 2-White 3-Blue 4-Black	18 300V 5.5A	1 M 2 M 4 M 6 M 10 M	MINCP-4FPX-1M MINCP-4FPX-2M MINCP-4FPX-4M MINCP-4FPX-6M MINCP-4FPX-10M	MINCP-4FPX-1M-R MINCP-4FPX-2M-R MINCP-4FPX-4M-R MINCP-4FPX-6M-R MINCP-4FPX-10M-R	Consult Factory
	5	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black	16 600V 8A	3 FT 6 FT 12 FT 20 FT 30 FT	MINP-5FP-3 MINP-5FP-6 MINP-5FP-12 MINP-5FP-20 MINP-5FP-30	MINP-5FP-3-R MINP-5FP-6-R MINP-5FP-12-R MINP-5FP-20-R MINP-5FP-30-R	MINP-5MP-3 MINP-5MP-6 MINP-5MP-12 MINP-5MP-20 MINP-5MP-30
	6	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black 6-Blue	18 300V 5.5A	3 FT 6 FT 12 FT 20 FT 30 FT	MINP-6FPX-3 MINP-6FPX-6 MINP-6FPX-12 MINP-6FPX-20 MINP-6FPX-30	MINP-6FPX-3-R MINP-6FPX-6-R MINP-6FPX-12-R MINP-6FPX-20-R MINP-6FPX-30-R	MINP-6MPX-3 MINP-6MPX-6 MINP-6MPX-12 MINP-6MPX-20 MINP-6MPX-30


For Stainless Steel or Nylon coupling nut, add a "-SS" suffix for Stainless or "-N" for Nylon (e.g. MINP-3FP-6 becomes MINP-3FP-6-SS) on straight cordsets. Please consult the factory for stainless steel or nylon right angle cordsets.

Specifications:

- Body: Oil Resistant Yellow Polyurethane (PUR)
- Contacts: Copper Alloy with Gold Plating
- Coupling Nut: Clear Anodized Aluminum
- Cable: Oil resistant Yellow Polyurethane Jacket,
 - 16 AWG: Rated at 600V, 80°C
 - 18 AWG: Rated at 300V, 80°C,
- Non-Wicking, Non-Hygroscopic, UL Style 20233
- Conductors:
 - 16 AWG Bare Copper, PVC Insulated
 - 18 AWG Bare Copper, PVC Insulated
- Temperature: -40°C to +80°C (-40°F to +176°F)
- Protection: IP 67
- Approvals:
 - U.S.: UL Recognized
 - Canada: C-UL Recognized

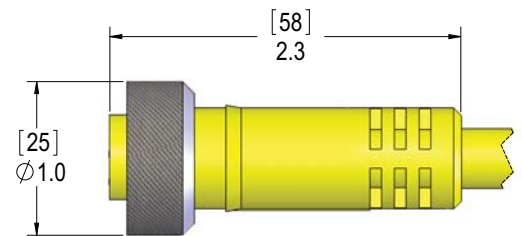

Straight Plug

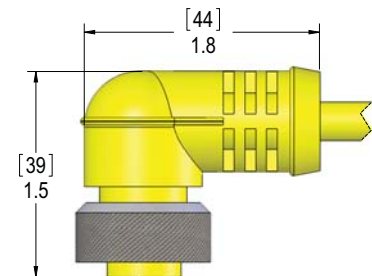

Right Angle Female Plug

